

Industrial Electric Monitor Motor Control Panel P/N's 81471068 & 81471082 Hardwired Monitor Motor Control Panel P/N's 81471086, 81471087, 81471088, 81471092, & 81471104

For use with Model 8394053 SPIT-FIRE® Monitor Installation, Operation, and Maintenance Instructions



98386000 REV. B

PRODUCT SAFETY

Important: Before installing and operating this equipment, read & study this manual thoroughly. Proper installation is essential to safe operation. In addition, the following points should be adhered to in order to ensure the safety of equipment and personnel:

- All personnel who may be expected to operate this equipment must be thoroughly trained in its safe and proper use.
- Before flowing water from this device, check that all personnel (fire service and civilian) are clear of the stream path. Also confirm stream direction will not cause avoidable property damage.
- Become thoroughly familiar with the hydraulic characteristics of this equipment, and the pumping system used to supply it. To produce effective fire streams, operating personnel must be properly trained.
- Whenever possible, this equipment should be operated from a remote location to avoid exposing personnel to dangerous fire conditions.
- Always open and close valves supplying this equipment slowly, so that the piping fills with water slowly, thus preventing the possible occurrence of water hammer.
- After each use, and on a scheduled basis, inspect equipment per instructions in the maintenance section.
- Disconnect power prior to servicing controls.
- Any modifications to the electrical enclosure will destroy the NEMA 4 rating and void warranty coverage of the enclosure and all components within.
- All equipment must be installed in accordance with local codes (NFPA 70 or EN/IEC 60079-14) as appropriate and in areas where equipment classification is suitable.

WARNING: Do not attempt to disconnect or work on any electrical equipment in this system unless power is removed or the area is known to be non-hazardous.

SYSTEM INFORMATION:	
SERIAL NUMBER: DETAILS:	_

TABLE OF CONTENTS

I	OVERVIEW	4
II	INSTALLATION INSTRUCTIONS	5
	A. Component Mounting	
	B. Interconnecting and Wiring Control System	
	C. MMCP/HMMCP Fuse and Wiring	
III	SPECIFICATIONS	8
IV	OPERATING INSTRUCTIONS	8
V	MAINTENANCE	8
VI	TROUBLESHOOTING	8
VII	MMCP MOUNTING DIMENSIONS	9
/III	HMMCP MOUNTING DIMENSIONS.	10
IX	MMCP SPARE PARTS DIAGRAM AND LIST	11
X	HMMCP SPARE PARTS DIAGRAM AND LIST	12

^{*}For the most up-to-date documentation and specifications, please visit our website at www.elkhartbrass.com

I OVERVIEW

The primary function of the Monitor Motor Control Panel (MMCP) is to control the monitor and nozzle in a controlled environment or from a remote location. This is accomplished by receiving an electric signal from an Operator Control Panel – OCP, and then engaging the associated relay for the connected monitor which then executes the required function. If a Hardwired Monitor Motor Control Panel (HMMCP) has been purchased, it acts as an MMCP and OCP in one panel. See section VIII for details.

This panel can be wired to accept different input voltages. The standard panel has a default wiring configuration of 220 VAC 60 Hz unless special ordered differently. See section II.C for details. If the input voltage configuration is changed, there are labels that need to be placed over the voltage configuration (P/N 44724000). The change can be accomplished in the field or the panel can be ordered from Elkhart Brass for the desired input voltage. The following are the part numbers that are associated with the conversions:

81471070 - MMCP 81471068 Wired for 100/120 VAC 50/60 Hz.

81471072 - MMCP 81471068 Wired for 440/480 VAC 50/60 Hz.

- * MMCP 81471082 Wired for 100/120 VAC 50/60 Hz.
- * MMCP 81471082 Wired for 440/480 VAC 50/60 Hz.
- * HMMCP 81471086 Wired for 100/120 VAC 50/60 Hz.
- * HMMCP 81471086 Wired for 440/480 VAC 50/60 Hz.
- * HMMCP 81471087 Wired for 100/120 VAC 50/60 Hz.
- * HMMCP 81471087 Wired for 440/480 VAC 50/60 Hz.
- * HMMCP 81471088 Wired for 100/120 VAC 50/60 Hz.
- * HMMCP 81471088 Wired for 440/480 VAC 50/60 Hz.

Electric Monitor Control Panel Features:

- Construction Stainless Steel enclosure rated for Hazardous Location (Class 1, Division 2)
- Compliance (NFPA 70) NEC: 2008, Article 501 Class I, Groups "B, C, & D," Division 2 & Article 505 Class I, Zone 2, AEx nA IIC T3 requirements; UL Labeled
- **Control Power** On/Off 2-Position selector switch
- Pilot Light Shows panel control power on
- **Internal Power** 24 VDC Power Supply for controls
- Control Relays 24 VDC, 37mA relay inputs for: Monitor directions (UP, DOWN, LEFT, and RIGHT), Nozzle (STRAIGHT STREAM and FOG), and Water Valve open and close and Auxiliary Device on and off.
- Water Valve and Auxiliary Device Options Fused external 24VDC or 120VAC power for operation of valve or device per system requirements.
- Water Valve Position Feedback and Auxiliary Device Feedback Options Terminal block relays are supplied for 24VDC or 120VAC voltage systems to provide feedback of the device being operated.
- Conduit Knockouts and Hubs None, all supplied by others.

^{*-}Custom Part Numbers are available for these options.

WARNING: Do not disassemble or take cover off any Monitor Motors. If cover is/has been removed, the warranty is void and the service life of the motor is significantly reduced.

II INSTALLATION INSTRUCTIONS

A. Component Mounting

Monitor Motor Control Panel (MMCP) Installation

- 1. This recommended distance the enclosure should be located from the Monitor Junction Box is 100 feet (30.48m). For other distances and wire sizes refer to chart in Figure 4.
- 2. Install the Panel approximately 3-4 feet (.91 to 1.22m) above grade and in the vertical position, on a rigid structure. Installation is normally at the base of the monitor riser.
- 3. The enclosure has four (4) mounting pads with .44" (11.18mm) diameter holes. Mounting hole centers are 18" (457.20mm) horizontal by 31.25" (793.75mm) vertical. Please refer to Figure 6 on page 10 for dimensional drawing.
- 4. Use hubs and glands appropriate for the area classification they will be used in. Also, adhere to local code requirements for all electrical connections.

B. Interconnecting and Wiring Control System – Wiring Connection Details Are Inside Panel Door

Main Power to MMCP

- 1. Install conduit from the main power distribution breaker box to Monitor Motor Control Panel. MMCPs are not provided with conduit hubs unless special ordered.
- 2. Wiring for any voltage requires a minimum of three conductors. If using 480 VAC only one phase is required or two legs. The third leg need not be run but can be terminated on the blank spare terminal. Always remember to run a ground and terminate with all cable runs. Wire to be sized to accommodate a minimum of 500 VA.
- 3. For wiring information and sizing see MMCP Fuse and Wiring Section Figure 1.

NOTE: Attachable labels, showing the separate wiring configurations, have been provided with the panel to document the configured panel and part number per the end user's requirements. Once changed cut out the correct label and peel off the backing and place over the old configuration.

MMCP to Monitor Junction Box

- 1. Install conduit between MMCP and Junction Box, located at flanged base of monitor.
- 2. To connect these boxes ten (10) conductors are required with conductor size to be determined by distance run. (For wiring information and sizing see MMCP Fuse and Wiring Figure 4)

Operator Control Panel to MMCP (NOT APPLICABLE FOR HMMCP)

- 1. Install conduit between MMCP and Operator Control Panel.
- 2. A minimum of fourteen (14) conductors plus spares are required <u>PER MONITOR</u>. (For wiring information and sizing see MMCP Fuse and Wiring Section Figure 3)

MMCP to optional Water Valve or Auxiliary Device

- 1. Install conduit between MMCP and valve.
- 2. The number of conductors will be determined by the device that is going to be controlled. Provisions have been designed in to the panel to accommodate various scenarios. As this is a generic manual the number of conductor cannot be accurately given this will be determined by the end user. (For wiring information and sizing see MMCP Fuse and Wiring Section Figure 3 and Figure 5)

Isolated Normally Open Dry Contacts

1. Each MMCP has been supplied with a set of normally open dry contacts that can be used per customer requirements. They are rated for 600VAC, 5 Amps and are closed when the water valve or auxiliary device relays are energized.

WARNING: Make sure panels are grounded according to area classification and company policy to assure panel code compliance.

C. MMCP Fuse and Wiring

MONITOR MOTOR CONTROL PANEL (MMCP) - (P/N 81471068) MAIN POWER, JUMPER CONNECTIONS, AND FUSING

	MAIN POWER	USE PANEL TERMINALS	JUMPER CONNECTIONS		FUSE	DESCRIPTION	PT. NO.
*	110/120 VAC 50/60 Hz. L1, N, AND G	L1 N AND C	2L1 to 3L		F1	CLASS CC, TIME DELAY 600-VAC, 5-AMP	FNQ-R-5
		LI, N, AND G			F2	CLASS CC, TIME DELAY 600-VAC, 5-AMP	FNQ-R-5
	220/240 VAC 50/60 Hz.	L1, L2, AND G	H2 to H4 X2	H1 to H3	F1	CLASS CC, TIME DELAY 600-VAC, 5-AMP	FNQ-R-5
				X2 to N X1 to 3L	F2	CLASS CC, TIME DELAY 600-VAC, 5-AMP	FNQ-R-5
	440/480 VAC 50/60 Hz.	L1, L2, AND G	2L1 to H4 X2 to 2L2 to H1 X1 to H2 to H3	X2 to N	F1	CLASS CC, TIME DELAY 600-VAC, 1-AMP	FNQ-R-1
				AT IO SL	F2	CLASS CC, TIME DELAY 600-VAC, 1-AMP	FNQ-R-1

^{* 220/240} VAC, 50/60 Hz. (FACTORY CONFIGURATION)

Figure 1: MMCP Fuse and Jumper Diagram




Figure 2: Typical MMCP Fuse and Jumper Diagram

WIRE SIZE FOR CONDUCTORS BETWEEN MONITOR MOTOR CONTROL PANEL AND OPERATOR CONTROL PANEL OR VALVES			
CONDUCTOR LENGTH	WIRE SIZE		
UP TO 750 FEET (228 m)	18 AWG (0.75 mm ²)		
750 TO 1500 FEET (457 m)	16 AWG (1.0 mm ²)		
1500 TO 2500 FEET (762 m)	14 AWG (2.5 mm ²)		
2500 TO 3500 FEET (1066 m)	12 AWG (4.0 mm ²)		

WIRE SIZE FOR CONDUCTORS BETWEEN MONITOR MOTOR CONTROL PANEL AND MONITOR JUNCTION BOX			
CONDUCTOR LENGTH	WIRE SIZE		
UP TO 75 FEET (22 m)	18 AWG (0.75 mm ²)		
75 TO 100 FEET (30 m)	16 AWG (1.0 mm ²)		
100 TO 200 FEET (60 m)	14 AWG (2.5 mm ²)		
200 TO 400 FEET (121 m)	12 AWG (4.0 mm ²)		

Figure 4: MMCP – Monitor Junction Box Wiring Chart

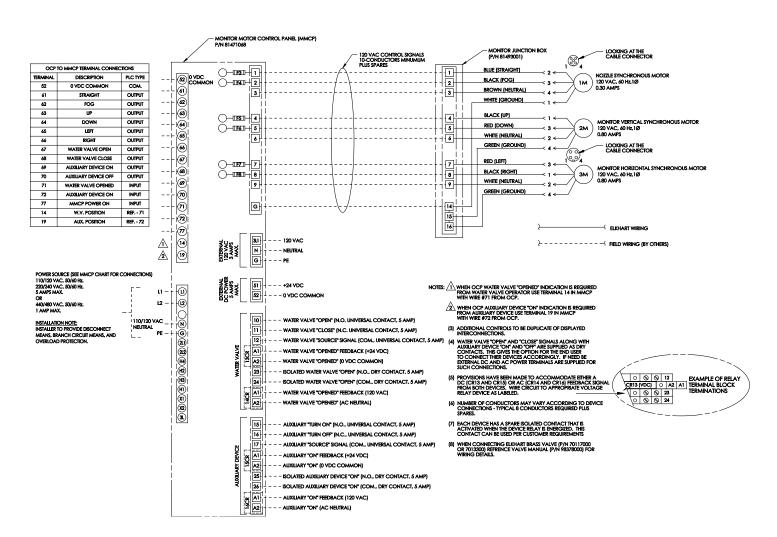


Figure 5: 81471068 MMCP/Monitor Motors - (Optional Valve and Auxiliary Device) Wiring Diagram

III SPECIFICATIONS

General Specs

• Input Power 120/240 VAC (50/60Hz.)

440/480 VAC (50/60 Hz.)

500 VA max. Power

Electrical Load
 5 AMPS MAX at 120/240 VAC

1 AMP MAX at 440/480 VAC

Fused Output Power
 24 VDC – 5 AMPS MAX

120 VAC – 3 AMPS MAX

• Panel Dimensions 24" X 30" (610 mm x 762 mm)

• Panel Weight Approx. 100 lbs (45 kg)

• Operating Temperature Range +14°F to +158°F (-10°C to +70°C)

UL and ATEX Product Marking (if ordered)

• UL Inspected and Labeled (Class 1, Division 2)

• CE ATEX certification available upon advanced request

IV OPERATING INSTRUCTIONS

This control panel has one ON/OFF 2-position selector switch. Move it to the ON position so the pilot light illuminates, showing the panel is now powered up, and ready for associated monitor operation.

V MAINTENANCE

Monthly Inspection and Maintenance

- 1. Check the indicator light and replace bulb if it's not operable.
- 2. Confirm that all terminal blocks and connections are properly taut to 4.5 7.1 in-lbs. (0.508 0.802 Nm).
- 3. Check for proper operation of the system overall, if there are problems with the system please refer to the Troubleshooting section for help.

VI TROUBLESHOOTING

- A. If Panel will not power up:
 - 1. Check the incoming supply power, and if it's the proper power requirement for the system.
 - 2. Check to make sure the main power transformer is wired correctly.
 - 3. Check fuses in panel to confirm they are good. If fuses are blown, replace them with same or equivalent fuse.
 - a. Check for causes in the interconnect wiring and connections.
 - b. Verify that the OCP is not trying to activate the monitor motor functions
 - c. If nothing is found consult with your Elkhart Brass representative.

- 4. Check panel power switch to make sure it is in the "Power On" position.
- 5. Check power supply to confirm there is 120 VAC running to it.
- B. If Pilot Light is not on when panel has power:
 - 1. Check the light bulb, and replace if it is burnt out.
- C. Function not working correctly:
 - 1. Check to see if there is a loose connection at the terminal blocks or contact blocks. Make sure all screw terminations are properly tightened to 4.5 7.1 in-lbs (0.508 0.802 Nm)
 - 2. Check relay for actuation. If bad, replace relay with new working relay.

Any problems that cannot be fixed/solved with this troubleshooting guide should be taken to your Elkhart Brass Representative to get further information.

WARNING: Do not attempt to disconnect or work on any electrical equipment in this system unless power is removed or the area is known to be non-hazardous.

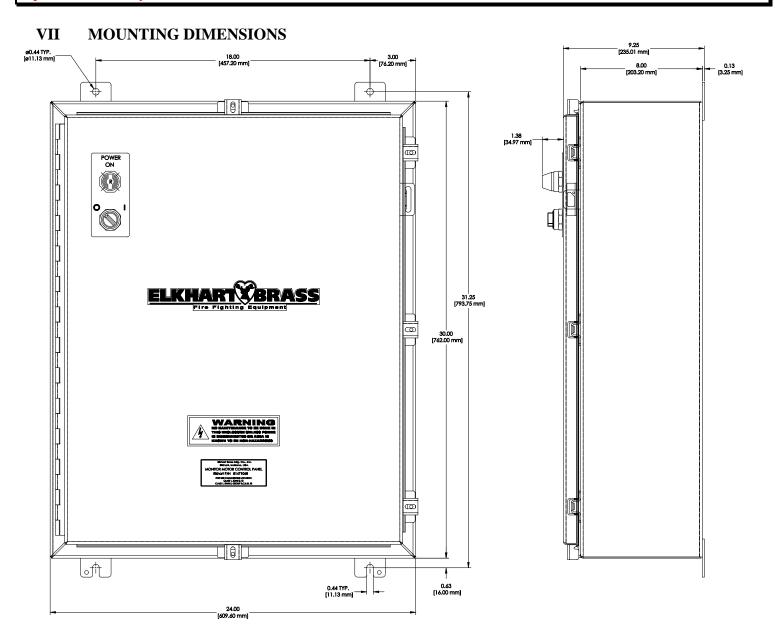


Figure 6: MMCP Mounting Dimensions

VIII MOUNTING DIMENSIONS

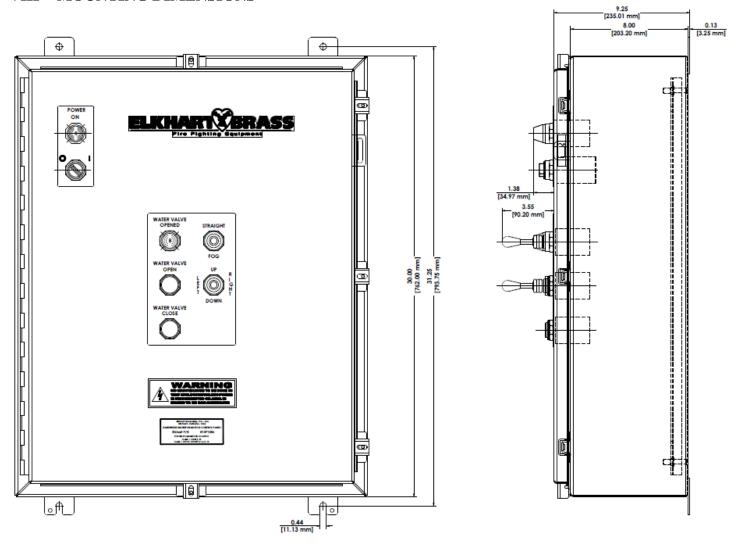



Figure 7: HMMCP Mounting Dimensions (814710856 shown)


IX Spare Parts List/Diagram

Refer to diagrams on the following pages for part locations.


	Part No.	Description	Manufacturer	Mfg P/N
Α	28244000	Capacitor - Nozzle Motor (3.0 Mfd)	Mallory or Eq.	C32FD3703
В	28247000	Capacitor - Monitor Vertical Motor (12.5 Mfd)	ASC or Eq.	X38S
С	28245000	Capacitor - Monitor Horizontal Motor (10.0 Mfd)	Mallory or Eq.	C32FD3710
D	59079130	Fuse - Class CC (5-Amp Time-Delay) Rejection Type	Bussmann or Eq.	FNQ-R-5
Ε	32233050	Fuse - Class CC (1A Fast Acting) Rejection Type	Bussmann or Eq.	KTK-R-1
F	32233040	Fuse - Class CC (1.5A Fast Acting) Rejection Type	Bussmann or Eq.	KTK-R-1 1/2
G	32233130	Fuse - Class CC (3A Fast Acting) Rejection Type	Bussmann or Eq.	KTK-R-3
Н	18455000	Pilot Light Bulb, White LED, Universal	Allen Bradley	800T-N376W
ı	59078000	Relay - 4PDT (4 FORM C) 24-VDC	Magnecraft	782XDXH21-24D
J	59078130	Relay - 4PDT (4 FORM C) 120-VAC	Magnecraft	782XDXH21-120A
K	28242000	Resistor - Monitor (100-Ohm, 114-Watt)	Ohmite Mfg. Co.	TL88K100R
L	59079211	Switch Contact Block, Explosion Protected, 1 N.O., 1	Allen Bradley	800TC-XAF
М	28243000	Resistor - Monitor (300-Ohm, 50-Watt)	Vishay Dale	RH-50 300 < 1%
N	65888000	Suppressor - 120VAC Relay	Magnecraft	70-BSMM-120
0	67298000	Terminal Block, Dioded, Reverse Bias	Allen Bradley	1492-JD3DR
Р	52955000	Power Supply 24VDC - 4.2 Amps (Single Phase Input)	Allen Bradley	1606-XLP100E
Q	52905000	Pilot Light with Red Lens, NEMA 4X, Class 1, Division		
_	32303000	2,	Allen Bradley	800H-QRH2R
R	65766000	2-Position ON/OFF Selector Switch w/ 2 N.O., 2 N.C.		
<u> </u>		Sealed Contacts, NEMA 4X, Class 1, Division 2	Allen Bradley	800H-HR2BF
		500 VA Transformer, 220/440 VAC, 50 Hz. OR		
S	52908000	240/480, 60 Hz. PRIMARY - 110 VAC 50 Hz. OR 120		
		VAC, 60 Hz. SECONDARY	Allen Bradley	1497-G-BASX-0-N
Т	67296000	24 VDC Electromechanical Terminal Block Relay		
Ľ		Class 1, Division 2	Allen Bradley	700-HLT1Z24-EX
U	67297000	120 VAC Electromechanical Terminal Block Relay		
		Class 1, Division 2	Allen Bradley	700-HLT1U1-EX
V	44435000	Pilot Light Lens, Red	Allen Bradley	800T-N26R
W	44435040	Pilot Light Lens, Blue (HMMCP's Only)	Allen Bradley	800T-N26B
X	32233160	Fuse - Class CC (5A Fast Acting) Rejection Type	Bussmann or Eq.	KTK-R-5

MONITOR MOTOR CONTROL PANEL- P/N's 81471068 & 81471082 SPARE PARTS DIAGRAM

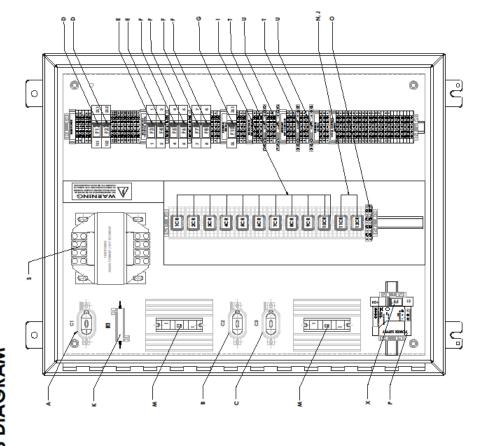

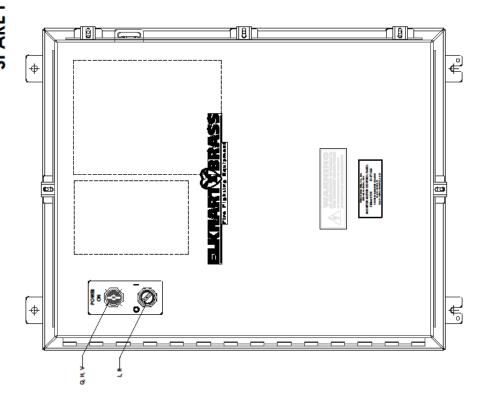

HARDWIRED MMCP P/N's 81471086/81471087/81471088/ 81471092/81471104 SPARE PARTS DIAGRAM*

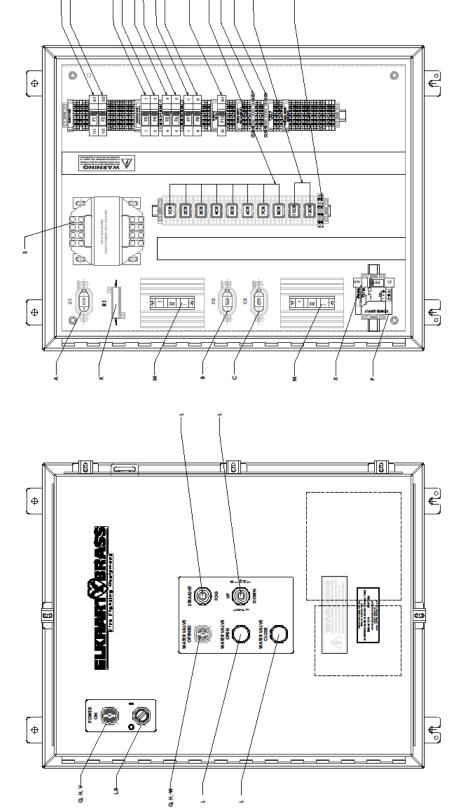

* 1-MONITOR HMMCP P/N 81471086 IS SHOWN

NOTES:	

X. ENGINEERING CHANGE REVSION EXPLANATIONS

Revision A – ECN 150211

- a. Section I
 - i. Removed part number 81471071 from list
- b. Section II
 - i. Removed note about junction box provided with 1 ½" NPT conduit hub
 - ii. Revised Main Power Panel table
 - iii. Updated wiring diagram, Figure 5
- c. Section VII
 - i. Update drawing of MMCP

Revision B – ECN 160806

- Title Page
 - Added MMCP and HMMCP Part Numbers
- Section I
 - Added HMMCP to Overview.
 - o Added information about special order part numbers for different voltages.
- Section IX
 - o Added Spare Parts Diagrams and List for MMCP's and HMMCP's